## NOTES THIS SHEET

1. PROVIDE SHUT-OFF VARIABLE AIR VOLUME UNIT WITH HOT WATER REHEAT COIL. MAINTAIN MANUFACTURER'S RECOMMENDED CLEARANCE AROUND UNIT AS INDICATED. REFER TO VAV SCHEDULE ON DRAWING M5.1W. PROVIDE HANGERS AND SUPPORTS COMPLETE. SUSPEND FROM OVERHEAD STRUCTURE WITH VIBRATION ISOLATION HANGERS. PROVIDE INTERMEDIATE STEEL ANGLE SUPPORTS AS REQUIRED. PROVIDE BACNET COMPATIBLE VAV CONTROLLER.
2. PROVIDE DOUBLE WALL, SPIRAL WOUND INTERSTITIALLY LINED MEDIUM PRESSURE DUCTWORK, INSULATION, HANGERS, AND SUPPORTS COMPLETE UPSTREAM OF VAV BOX.
3. PROVIDE LOW PRESSURE DUCTWORK, INSULATION, HANGERS, AND SUPPORTS COMPLETE.
4. PROVIDE EXHAUST RETURN DUCTWORK, HANGERS, AND SUPPORTS. SIZE AS INDICATED ON DRAWING.
5. PROVIDE CEILING MOUNTED UNIT HEATER, HANGERS, AND SUPPORTS.
6. PROVIDE 8x8 ACCESS DOOR.

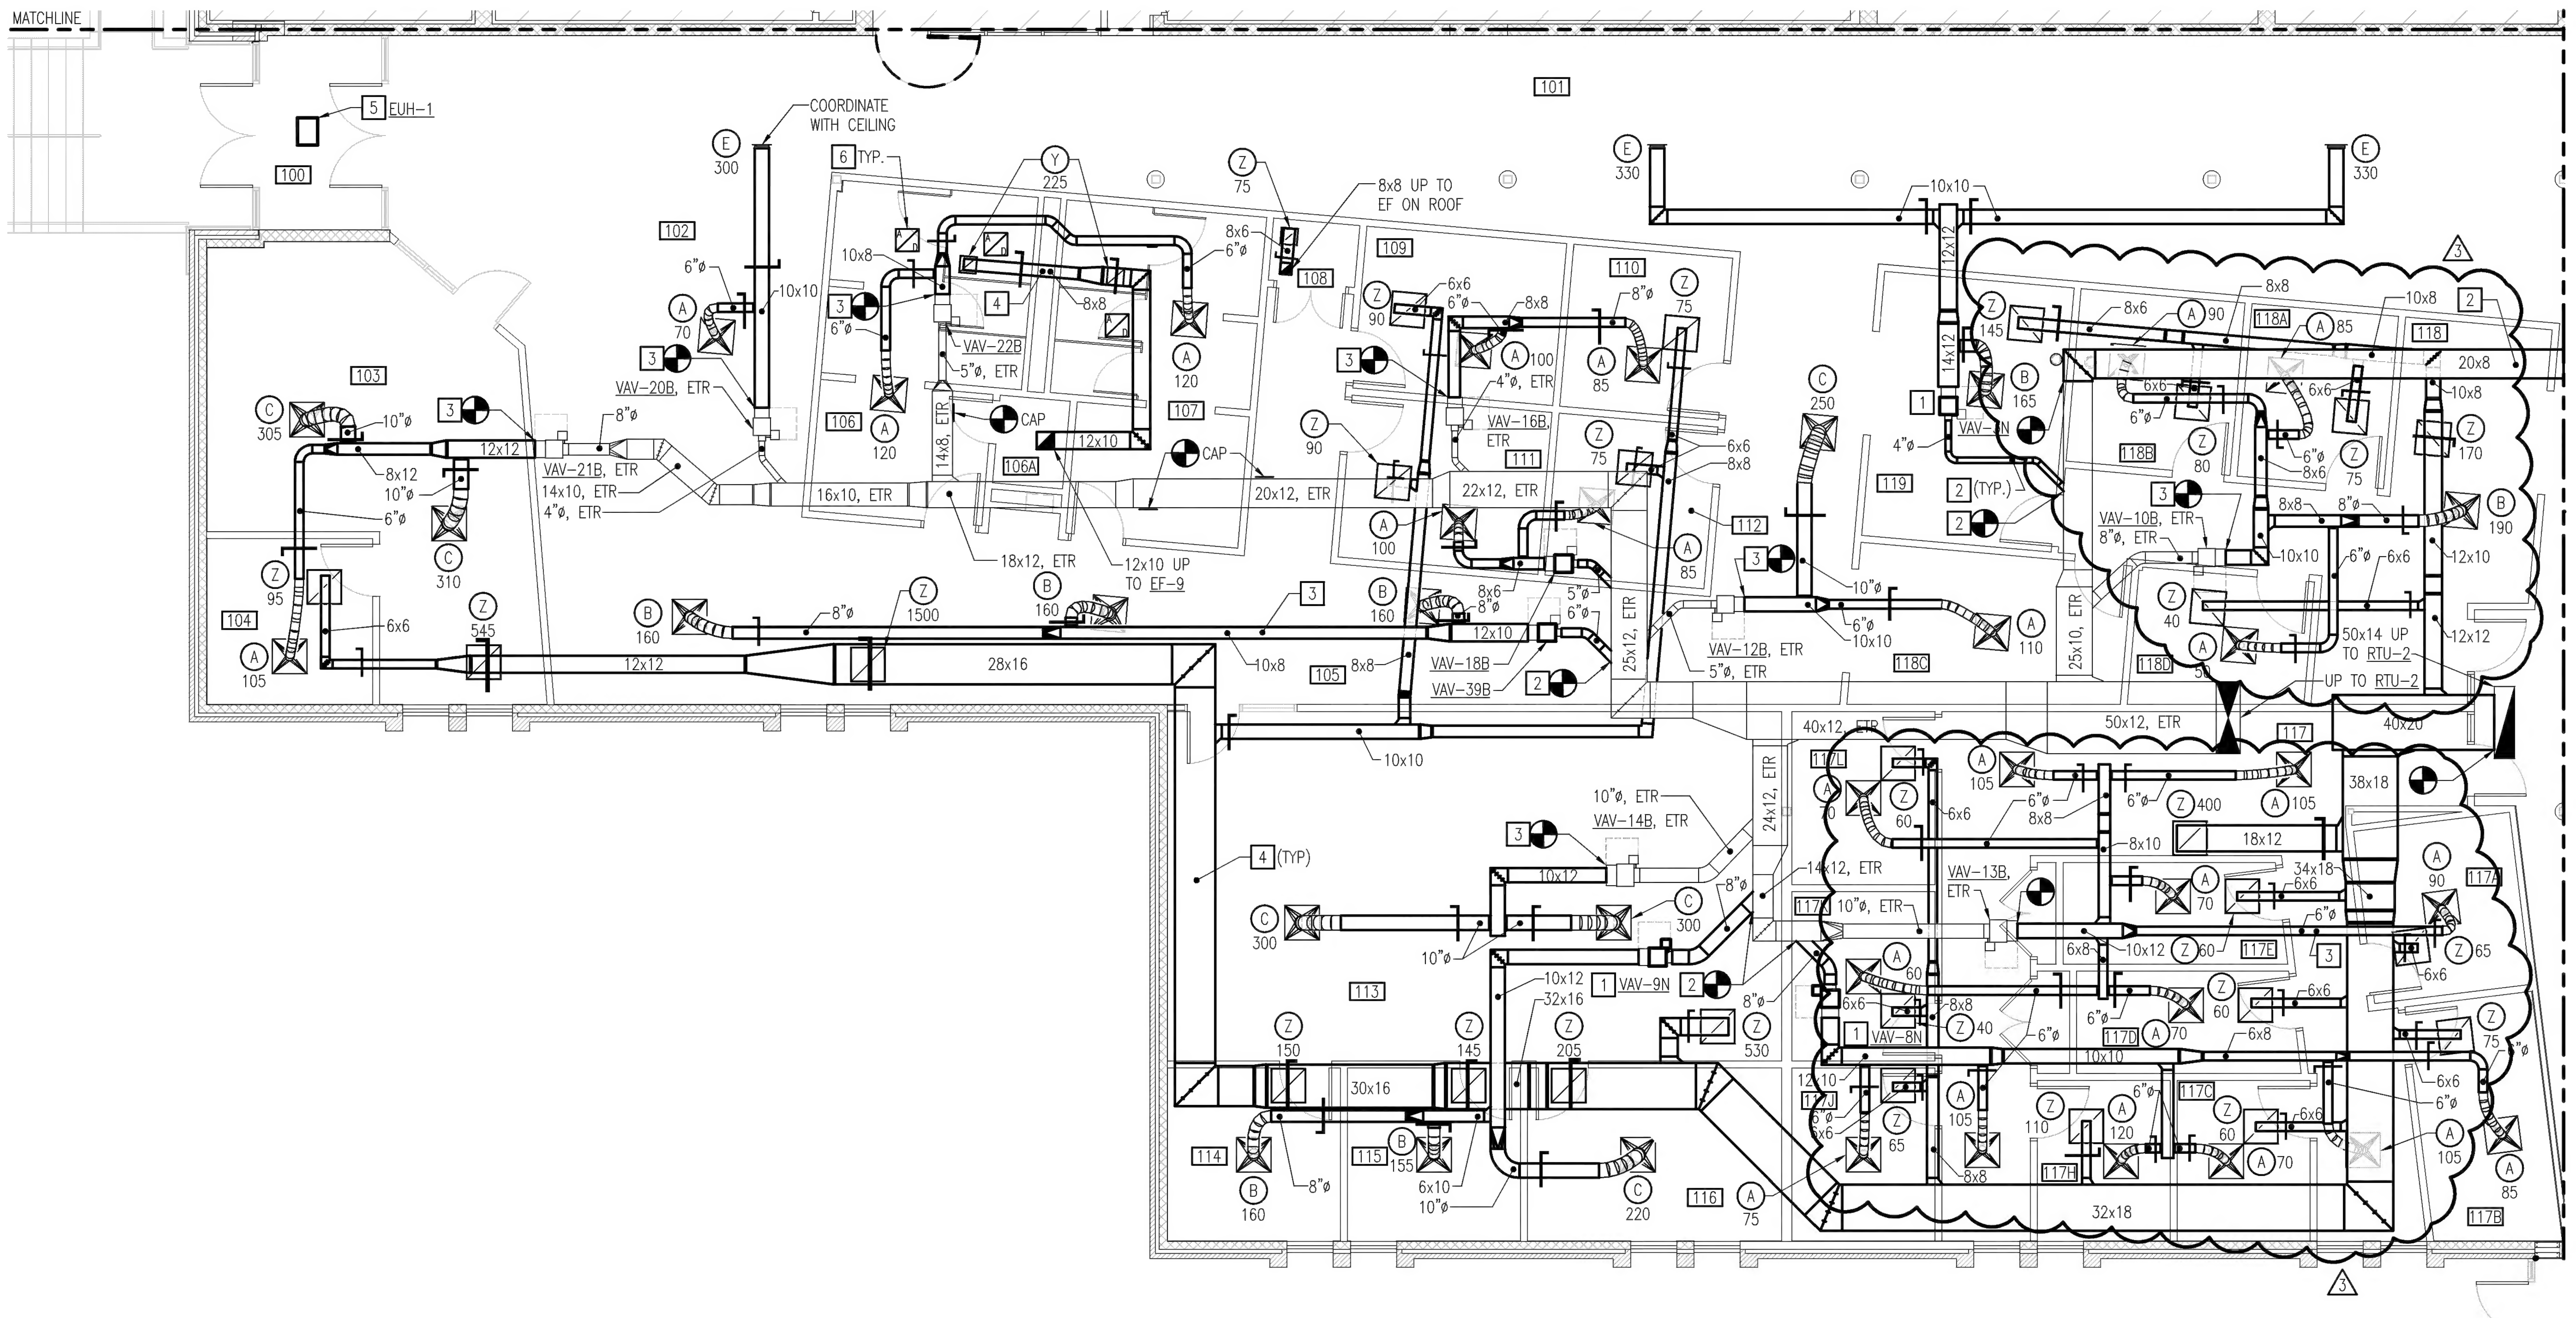


## NEW WORK FLOOR PLAN - MECHANICAL DUCTWORK

SCALE: 3/16" = 1'-0"

### SECTION 2 ROOM SCHEDULE

| | |
|---|---|
| 100 | VESTIBULE |
| 101 | CORRIDOR |
| 102 | RECEPTION |
| 103 | ADMISSIONS |
| 104 | OFFICE |
| 105 | CORRIDOR |
| 106 | MENS |
| 106A | JANITOR |
| 107 | WOMENS |
| 108 | CLOSET |
| 109 | OFFICE |
| 110 | OFFICE |
| 111 | OFFICE |
| 112 | OFFICE |
| 113 | OPEN OFFICE |
| 114 | OFFICE |
| 115 | OFFICE |
| 116 | OFFICE |
| 117 | OPEN OFFICE |
| 117A | HUDDLE |
| 118 | OFFICE |
| 118A | OFFICE |
| 118B | OFFICE |
| 118C | PURCHASING |
| 118D | STORAGE |
| 119 | CASHIER |

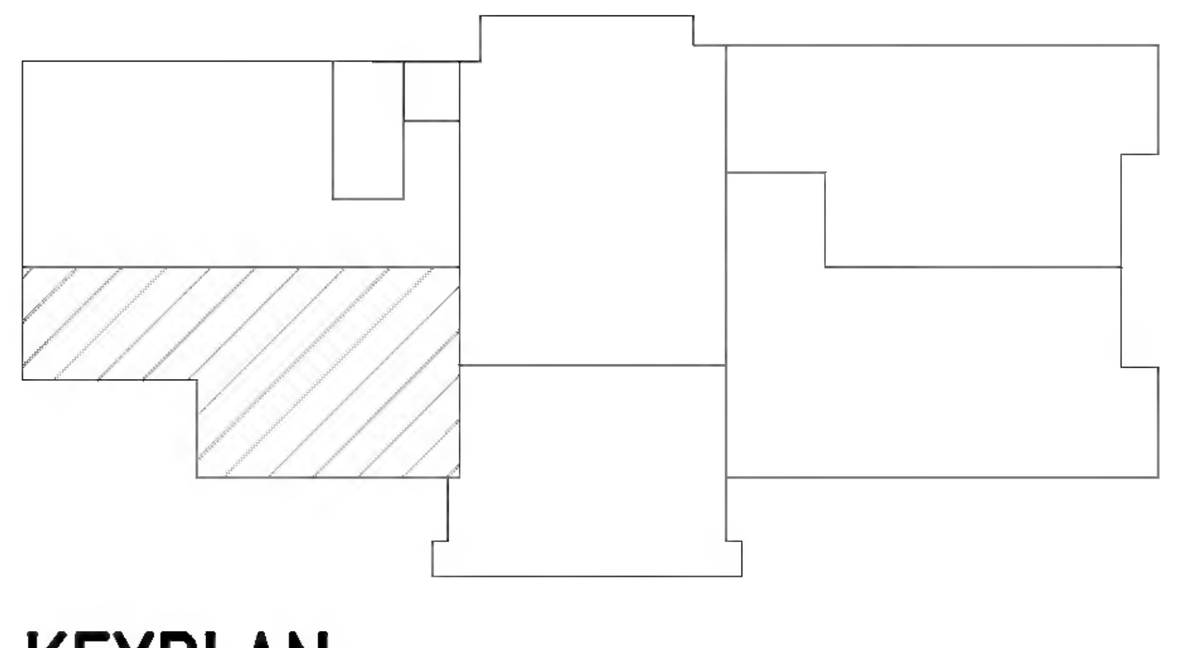

## KEYPLAN

NO SCALE


Pace COLLABORATIVE
MECHANICAL ELECTRICAL ENGINEERS
VIRGINIA BEACH, VA - 757-499-7223


## GRAPHIC SCALES

3/16" = 1'-0" 0' 5' 10' 20'


nbj ARCHITECTURE
A Professional Limited Company
GROVE PARK SQUARE
11537-B NUCKOLS ROAD
Richmond, Virginia 23059
(804) 273-9811 fax: (804) 273-9843


RAPPAHANNOCK COMMUNITY COLLEGE
CAMPUS RENOVATIONS
WARSAW + GLENNS, VIRGINIA
PC: 260-17712

WARSAW CAMPUS NEW WORK FLOOR PLAN - MECHANICAL DUCTWORK

Date: APRIL 21, 2010

| REVISIONS NO. | DATE |
|---|---|
| 1 | FEBRUARY 9, 2010 |
| 2 | MARCH 3, 2010 |
| 3 | APRIL 21, 2010 |

COMMONWEALTH OF VIRGINIA
JOHN M. NEWELL
Lic. No. 035329
04.21.10
PROFESSIONAL ENGINEER

Sheet M1.2W

File Number XX